

100
9/8/26

DECEMBER 15, 2026

Letting Date

HMA RESURFACING AND COLD-IN-PLACE RECYCLING

PROJECT NO: FM-C097(156)-55-97

WOODBURY COUNTY



TABULATION OF UTILITIES

CITY OF ANTHON
RUTH GROTH - (712)373-5218
CENTURYLINK
SADIE HULL - (918)547-0147
LONG LINES BROADBAND
MILES PATTON - (712)271-5550


TRAFFIC CONTROL PLAN

THIS ROAD WILL BE CLOSED TO THROUGH TRAFFIC DURING CONSTRUCTION. LOCAL TRAFFIC TO ADJACENT PROPERTIES WILL BE MAINTAINED AS PROVIDED FOR IN ARTICLE 1107.02 OF THE CURRENT STANDARD SPECIFICATIONS. TRAFFIC CONTROL DEVICES, PROCEDURES, LAYOUTS, AND SIGNING INSTALLED WITHIN THE LIMITS OF THIS PROJECT SHALL CONFORM TO THE "MANUAL ON UNIFORM TRAFFIC CONTROL DEVICES FOR STREETS AND HIGHWAYS" AS ADOPTED BY THE DEPARTMENT PER 751 OF THE IOWA ADMINISTRATIVE CODE (IAC) CHAPTER 150.

ALL SAFETY CLOSURES SHALL BE FURNISHED, ERECTED, MAINTAINED AND REMOVED BY THE CONTRACTOR. D. 38 SHALL BE LEFT OPEN DURING ALL ADD AND SIDEWALK CONSTRUCTION.

MAINTENANCE OF SIGNS, BARRICADES AND SAFETY CLOSURES AS STATED IN ARTICLE 1107.02, SHALL APPLY ON THIS PROJECT.

ROAD CLOSURES ON THIS PROJECT SHALL BE THE RESPONSIBILITY OF THE CONTRACTOR AND SHALL BE IN ACCORDANCE WITH ROAD STANDARD TC-252. PEDESTRIAN CLOSURES SHALL APPLY ON THIS PROJECT.



I hereby certify that this engineering document was prepared by me or under my direct personal supervision and that I am a duly licensed Professional Engineer under the laws of the State of Iowa.

Amanda Goodenow
Amanda Goodenow
Date 9/1/2026

Iowa Registration Number 25734
Expiration Date 12/31/2026

Pages or sheets covered by this seal:

Sheets B.01, M-01, S.01-S.07,



I hereby certify that this engineering document was prepared by me or under my direct personal supervision and that I am a duly licensed Professional Engineer under the laws of the State of Iowa.

Laura M Sievers
Laura M Sievers
Date 9/8/26

Iowa Registration Number 19243
Expiration Date 12/31/2026

Pages or sheets covered by this seal:

Pages A.01 - A.02, B.02-C.03

2023 AADT 200 - 1,270 V.P.D.

IOWA DEPARTMENT OF TRANSPORTATION Highway Division PLANS OF PROPOSED IMPROVEMENT ON THE FARM-TO-MARKET SYSTEM WOODBURY COUNTY HMA RESURFACING/ COLD-IN-PLACE RECYCLING PROJECT NO. FM-C097(156)-55-97

REFER TO THE PROPOSAL FOR LIST OF APPLICABLE SPECIFICATIONS

On D 38, from IA HWY 31 E. 6
miles to L 37

TOTAL SHEETS - 16

Project Number: FM-C097(156)-55-97

INDEX OF SHEETS

No.	Description
A.01	TITLE SHEET
A.02	LOCATION MAP
B.01	DETAILS
B.02	TYPICAL SECTIONS AND DETAILS
B.03	GENERAL NOTES, TABULATIONS, AND TYPICAL DETAILS
C.01-C.03	ESTIMATE OF QUANTITIES AND REFERENCE INFORMATION
L.01	STORM SEWER DETAILS
S.01-S.04	SIDEWALK SCHEDULE
S.05	SIDEWALK MAIN ST AND MILLER AVE
S.06	SIDEWALK BRIDGE ST AND 3RD AVE
S.07	SIDEWALK BRIDGE ST AND CAULEY AVE

ROAD STANDARD PLANS

The following Standard Plans shall be considered applicable to construction work on this project.

Identification	Date	Identification	Date	Identification	Date
BA-221	10-18-22	PV-10	10-20-23	TC-212	04-18-23
BA-225	10-17-23	SW-103	10-21-25	TC-214	04-18-23
U-201	04-18-17	SW-311	10-21-25	TC-501	10-15-19
PM-110	10-15-24	SW-513	10-21-25		
PM-120	10-15-24	TC-202	04-18-23		

MILEAGE SUMMARY

DIV.	LOCATION	LIN. FT.	MILES
1	STA. 15+00 TO 32+75	30,875	
1	DEDUCT BRIDGE STA. 78+50	-920	
1	DEDUCT BRIDGE STA. 148+75	-270	
1	TOTAL LENGTH OF DIV. I	29,685	0.5622
2	STA. 0+15 TO 30+88	3,053	
2	DEDUCT CONCRETE SECTION STA. 9+82	-214	
2	DEDUCT CONCRETE SECTION STA. 20+27	-240	
2	TOTAL LENGTH OF DIV. II	2,599	0.492

<i>[Signature]</i>
<i>[Signature]</i>
<i>[Signature]</i>
Board of Supervisors
Date

Woodbury County

Project Number: FM-C097(156)-55-97

Sheet A.01

DECEMBER 15, 2026

Letting Date



IOWA
DEPARTMENT OF TRANSPORTATION
 Highway Division
 PLANS OF PROPOSED IMPROVEMENT ON THE
FARM-TO-MARKET SYSTEM
WOODBURY COUNTY
HMA RESURFACING/
COLD-IN-PLACE RECYCLING
PROJECT NO. FM-C097(157)-55-97

TABULATION OF UTILITIES

NO UTILITIES ARE EXPECTED TO BE ENCOUNTERED OR MOVED BUT CONTRACTOR SHALL DO ONE CALL 30 DAYS PRIOR TO CONSTRUCTION

TRAFFIC CONTROL PLAN

THIS ROAD WILL BE CLOSED TO THROUGH TRAFFIC DURING CONSTRUCTION. LOCAL TRAFFIC TO ADJACENT PROPERTIES WILL BE MAINTAINED AS PROVIDED FOR IN ARTICLE 1107.05 OF THE CURRENT STANDARD SPECIFICATIONS. TRAFFIC CONTROL DEVICES, PROCEDURES, LAYOUTS, AND SIGNING INSTALLED WITHIN THE LIMITS OF THIS PROJECT SHALL CONFORM TO THE "MANUAL ON UNIFORM TRAFFIC CONTROL DEVICES FOR STREETS AND HIGHWAYS" AS ADOPTED BY THE DEPARTMENT PER 761 OF THE IOWA ADMINISTRATIVE CODE (IAC) CHAPTER 130.

ALL SAFETY CLOSURES SHALL BE FURNISHED, ERECTED, MAINTAINED AND REMOVED BY THE CONTRACTOR.


MAINTENANCE OF SIGNS, BARRICADES AND SAFETY CLOSURES AS STATED IN ARTICLE 1107.09 SHALL APPLY ON THIS PROJECT.

ROAD CLOSURES ON THIS PROJECT SHALL BE THE RESPONSIBILITY OF THE CONTRACTOR AND SHALL BE IN ACCORDANCE WITH ROAD STANDARD TC-252. NO PEDESTRIAN FACILITIES ARE PRESENT.

WOODBURY COUNTY WILL ESTABLISH AND MAINTAIN THE DETOUR ROUTE.

REFER TO THE PROPOSAL FOR LIST OF APPLICABLE SPECIFICATIONS

On L 27, from D 50 S 6 miles to
D 54

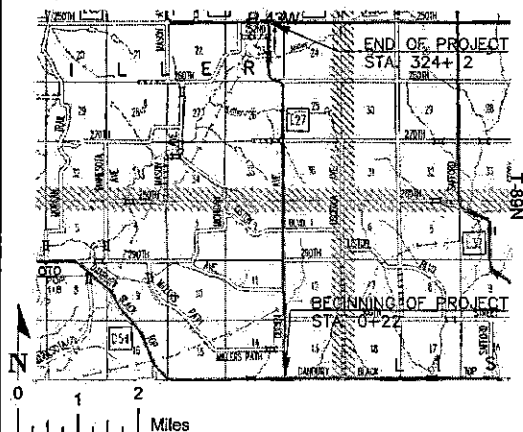

I hereby certify that this engineering document was prepared by me or under my direct personal supervision and that I am a duly licensed Professional Engineer under the laws of the State of Iowa.

9/8/26
Date

Laura M Sievers

Iowa Registration Number 19243
Expiration Date 12/31/2026

Pages or sheets covered by this seal:
Pages 1-12

TOTAL SHEETS - 12

Project Number: FM-C097(157)-55-97

INDEX OF SHEETS

No.	Description
1	TITLE SHEET
2	ESTIMATE OF QUANTITIES AND REFERENCE INFORMATION
3	GENERAL NOTES, TABULATIONS, AND TYPICAL DETAILS
4	TYPICAL DETAILS
5-12	INTERSECTION DETAILS

ROAD STANDARD PLANS

The following Standard Plans shall be considered applicable to construction work on this project.

Identification	Date	Identification	Date	Identification	Date
PM-110	10-15-24				
PM-120	10-15-24				
PV-10	10-20-26				
TC-252	10-21-25				

MILEAGE SUMMARY

DIV.	LOCATION	LIN. FT.	MILES
1	STA 0+22.0 TO 324+12.0	32,390.0	
1	DEDUCT BRIDGE STA 293+59.7 -400		
1	TOTAL LENGTH OF DIV. 1	31,990	6.059

David A. Bryant

Approved: _____

Board of Supervisors

2023 AADT 110 V.P.D.

Woodbury County

Project Number: FM-C097(157)-55-97

Sheet 1.

WOODBURY COUNTY

PROJECT NO: FM-C097(157)-55-97

HMA RESURFACING AND COLD-IN-PLACE RECYCLING

Letting Date
DECEMBER 15, 2026

WOODBURY COUNTY

HMA RESURFACING

PROJECT NO: L-1394-73-97



TABULATION OF UTILITIES

NO UTILITIES ARE EXPECTED TO BE ENCOUNTERED OR MOVED BUT CONTRACTOR SHALL DO ONE CALL 30 DAYS PRIOR TO CONSTRUCTION

TRAFFIC CONTROL PLAN


THIS ROAD WILL BE CLOSED TO THROUGH TRAFFIC DURING CONSTRUCTION. LOCAL TRAFFIC TO ADJACENT PROPERTIES WILL BE MAINTAINED AS PROVIDED FOR IN ARTICLE 1107.08 OF THE CURRENT STANDARD SPECIFICATIONS. TRAFFIC CONTROL DEVICES, PROCEDURES, LAYOUTS, AND SIGNS INSTALLED WITHIN THE LIMITS OF THIS PROJECT SHALL CONFORM TO THE "MANUAL ON UNIFORM TRAFFIC CONTROL DEVICES FOR STREETS AND HIGHWAYS" AS ADOPTED BY THE DEPARTMENT PER 761 OF THE IOWA ADMINISTRATIVE CODE (IAC) CHAPTER 130.

ALL SAFETY CLOSURES SHALL BE FURNISHED, ERECTED, MAINTAINED AND REMOVED BY THE CONTRACTOR.

MAINTENANCE OF SIGNS, BARRICADES AND SAFETY CLOSURES AS STATED IN ARTICLE 1107.09 SHALL APPLY ON THIS PROJECT.

ROAD CLOSURES ON THIS PROJECT SHALL BE THE RESPONSIBILITY OF THE CONTRACTOR AND SHALL BE IN ACCORDANCE WITH ROAD STANDARD TC-252. NO PEDESTRIAN FACILITIES ARE PRESENT.

WOODBURY COUNTY WILL ESTABLISH AND MAINTAIN THE DETOUR ROUTE.

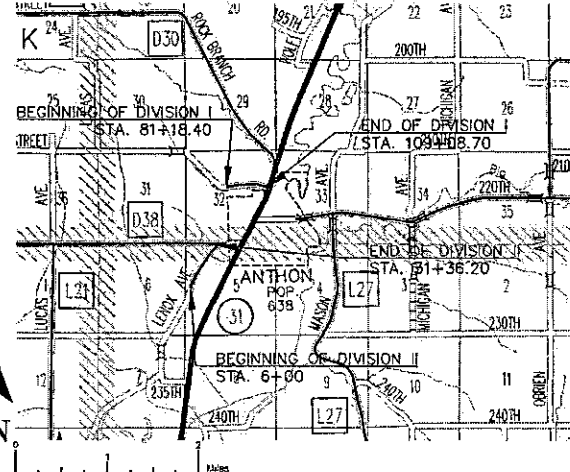

IOWA DEPARTMENT OF TRANSPORTATION Highway Division PLANS OF PROPOSED IMPROVEMENT ON THE SECONDARY ROAD SYSTEM WOODBURY COUNTY HMA RESURFACING PROJECT NO. L-1394-73-97

REFER TO THE PROPOSAL FOR LIST OF APPLICABLE SPECIFICATIONS

On Lenox Ave. NE 0.4 miles to D38
and 210th St 0.5 mi W of IA 31

TOTAL SHEETS - 4

Project Number: L-1394-73-97

INDEX OF SHEETS

No.	Description
1	TITLE SHEET
2	ESTIMATE OF QUANTITIES AND REFERENCE INFORMATION
3	GENERAL NOTES, TABULATIONS, AND TYPICAL DETAILS
4	TYPICAL DETAILS

ROAD STANDARD PLANS

The following Standard Plans shall be considered applicable to construction work on this project.

Identification	Date	Identification	Date	Identification	Date
PM-110	10-15-24				
PM-120	10-15-24				
PV-10	10-20-26				
TC-252	10-21-25				

MILEAGE SUMMARY

DIV.	LOCATION	LIN. FT.	MILES
I	STA. 81+18.40 TO STA. 109+08.70	2,790.30	0.528
II	STA. 6+00 TO STA. 31+36.20	2,536.20	0.480
	TOTAL LENGTH	5,326.50	1.008

I hereby certify that this engineering document was prepared by me or under my direct personal supervision and that I am a duly licensed Professional Engineer under the laws of the State of Iowa.

 Laura M. Sievers Date 9/8/26

Iowa Registration Number 19243
Expiration Date 12/31/2026

Pages or sheets covered by this set:
Pages 1-4

DIV I 2023 AADT 70 V.P.D. DIV II 2023 AADT 60 V.P.D.

Woodbury County

Project Number: L-1394-73-97

Sheet 1